


PREMIUM ARCHITECTURAL

MYRIAD of INSTALLATION CAPABILITIES!

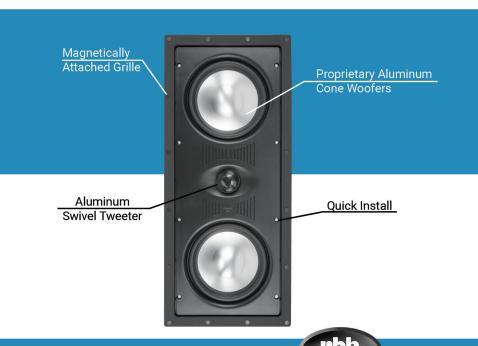

You've found your solution to easy installation, higher output, exceptional performance home theater! The RBH VM-616 is the excellent choice for your entire reference level system.

Magnetically attached grilles can be painted to blend your speakers into your color scheme. Mate your VM-616s with RBH SI subwoofers for the complete visceral surround experience!

VM-616

The VM-616, with its dual 61/2inch aluminum cone woofers and 1-inch aluminum dome swivel tweeter, has high power handling capacity and features quick transient response for high definition in low bass frequencies. Because of its D'Appolito (woofer/ tweeter/woofer) design, it can be used for all channels of a complete home theater system. Swing out dog leg mounting system with pre-started screws for fast and easy installation. Self resetting Polyswitch protection circuitry designed to protect the tweeter from being over driven.

The VM-616 is timbre matched to any "VM" model across all the RBH Visage line thus enabling vast combination options to configure the ultimate system for your theater and whole home audio.

VISAGE-SERIES In-wall In-ceiling Architectu<u>ral</u>


- Our architectural series provides many in-wall and in-ceiling options to fit any scenario or need.
- Paintable white magnetically attached Stainless Steel grille. Black is also available.
- Available accessories, NCB-616, BP-616 and FB-W make installation easy. Please check website or contct your dealer for details.



*Lifetime Limited Warranty (with registration) from date of purchase to be free from defects and workmanship. For more information contact your RBH dealer or check our website.

It is RBH Sound policy to continuously incorporate improvements into products; all specifications are subject to change without notice. For the most current information visit us online at https://rbhsound.com. Copyright ©2023 RBH Sound. All Rights Reserved.

VM-616

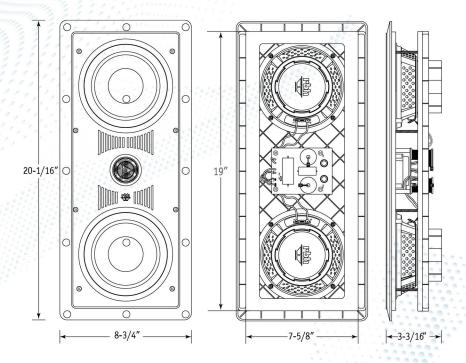

Model	VM-616
SYSTEM TYPE	Architectural Loudspeaker
FREQUENCY RESPONSE	50Hz-20kHz ± 3dB
SENSITIVITY (2.83V @ 1 Meter)	91dB
RECOMMENDED POWER	15-180 Watts
DRIVE UNITS	(1) Aluminum Dome Tweeter, (2) 6.5" Aluminum Woofers
TWEETER PROTECTION	Yes, self resetting poly-switch
CROSSOVER FREQUENCY	3000Hz
CROSSOVER SLOPE	12dB/Octave
IMPEDANCE	6Ω
CABINET/ COLOR	Borderless Magnetic Frame
GRILLE	White Stainless Steel (black available)
WEIGHT	6.55 lbs. (2.97 kg)
FINISHED DIMENSIONS	8-7/8" W x 20-1/4" H x 3-3/16" D (225 x 510 x 81mm) with grille
WARRANTY	*Lifetime Limited